
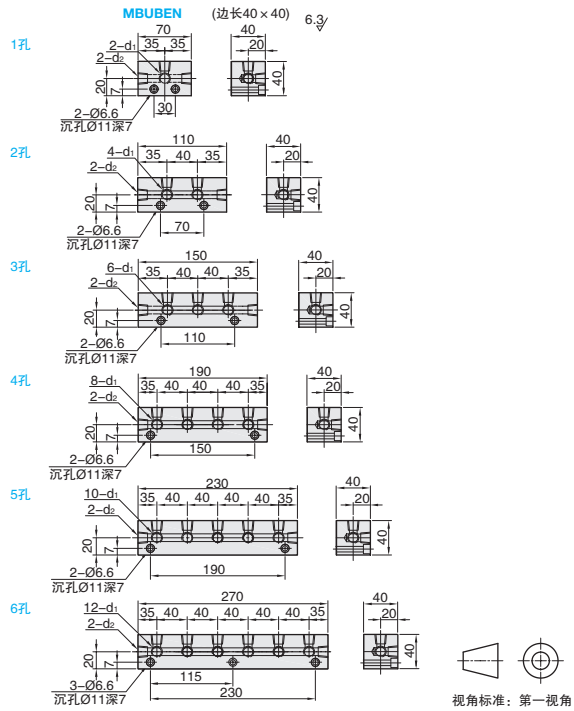


按图定制

①代号	边长	材质	表面处理	最高使用压力
前后贯通型 MBUAEV	30×35	一般结构用钢	镀锌	20.6MPa(≈210Kgf/cm²)以下
前后半贯通顶孔型 MBUBEN	40×40			

△由于批次不同,发货带表面处理产品可能存在色差,不影响尺寸及功能。

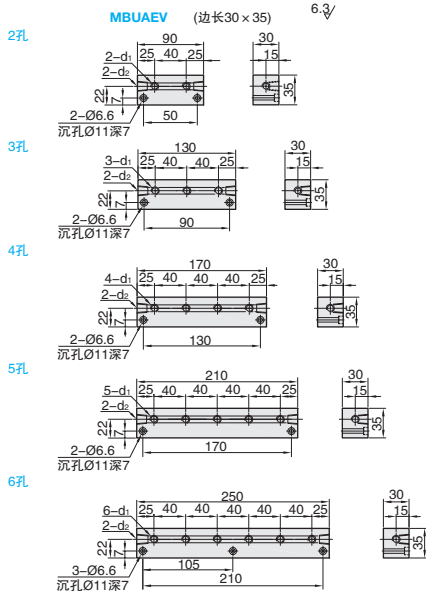

L5 歧管块



①代号 - ②侧面孔数K - ③螺纹代号L
MBUAEV - K2 - L22

①代号	②侧面孔数K	③螺纹代号L	d ₁ Rc(PT)	d ₂ Rc(PT)
	前后贯通型 MBUAEV (30×35)	2	12	1/8
22			1/4	3/8
3		23	1/4	1/2
		33	3/8	1/4
		34	3/8	1/2
4		12	1/8	1/4
		22	1/4	1/4
		23	1/4	3/8
5		33	3/8	1/2
		34	3/8	1/2
		12	1/8	1/4
6		22	1/4	1/4
	23	1/4	3/8	
	33	3/8	3/8	
	34	3/8	1/2	
	12	1/8	1/4	
	22	1/4	1/4	
	23	1/4	3/8	
	33	3/8	3/8	
	34	3/8	1/2	

①代号	②侧面孔数K	③螺纹代号L	d ₁ Rc(PT)	d ₂ Rc(PT)
	前后半贯通顶孔型 MBUBEN (40×40)	1	33	3/8
13			1/8	3/8
2		22	1/4	1/4
		23	1/4	3/8
		34	3/8	1/2
3		22	1/4	1/4
	23	1/4	3/8	
	33	3/8	3/8	
4	12	1/8	1/4	
	22	1/4	1/4	
	23	1/4	3/8	
5	23	1/4	3/8	
	33	3/8	3/8	
	34	3/8	1/2	

△ 螺纹代号: 如12, 表示d1为1/8管螺纹, d2为1/4管螺纹。