


NOTES:

1. ASSEMBLY MUST BE FREE FROM BURRS, SHARP EDGES AND OTHER IMPERFECTIONS THAT ADVERSELY AFFECT FIT, FUNCTION OR APPEARANCE
2. ASSEMBLY TO BE FREE OF OIL, GREASE(EXCEPT ON BALL TRACK OF SLIDE) OR OTHER CONTAMINANTS.
3. GREASE APPLICATION ALONG BALL TRACKS
4. BALL MIGRATION MAY OCCUR—SHOULD THIS HAPPEN AN OVERRIDE EFFORT WILL BE REQUIRED.
5. MOVEMENT: 10N±6N
(ROOM TEMPERATURE, SPEED 500MM/MIN ±100MM/MIN)

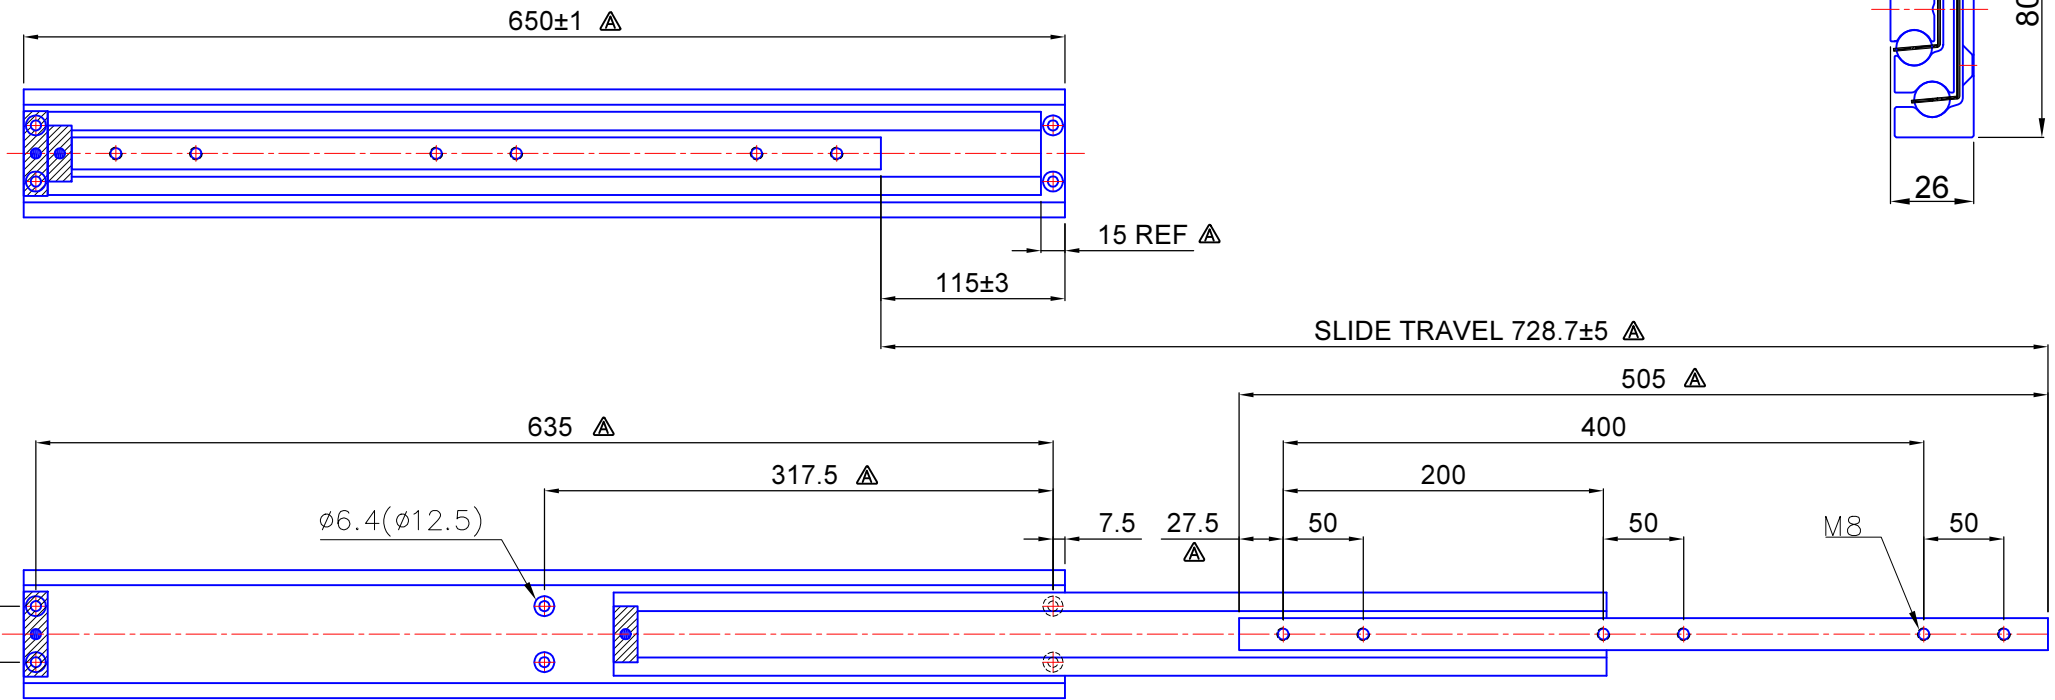

		MATERIAL	7005	APPROVED.	DATE	ITEM NO.	GENERAL TOLERANCE	
	2019.05.13	UNIT	MM	CHECKED.		XXXXX	SS-ISO-2768-1 MEDIUM	
	2019.05.09	SCALE	1:1	DRAWN.	2019.05.13	Pansy	DRAWING NO. DL5162-2100	
LTR.	DATE	DESCRIPTION	FILE:	REMARKS		Solution for Slide Slideworks ™		
REVISIONS				XXXXX	XXXXX <input checked="" type="checkbox"/> pdf			