

No. 6370ZNR-20-02

Pull-stud K20 for engagement screw M16 with reduced fitting collar

Hardened, for clamping modules size K20.



NEW!



Order no.	Size	dia. DN	dia. D1	dia. D2	H	H1	M	T	Weight [g]
562768	K20	32,0	24	16	28	23	-	5	83
562769	K20	32,0	24	16	28	23	-	5	83
562771	K20	31,8	24	16	28	23	-	5	83
303172	K20	31,8	-	-	-	-	M 8	-	110

Design:


Order no. 562768: zero point pull-stud, order no. 562769: timing pull-stud, order no. 562771: undersize pull-stud, order no. 303172: protection pull-stud

Application:

For clamping in a fitting hole with a reduced diameter e.g. before heat treatment of a workpiece. After the boring out the hole, the respective standard pull-stud can be used.

On request:

Protection pull-stud made of plastic.

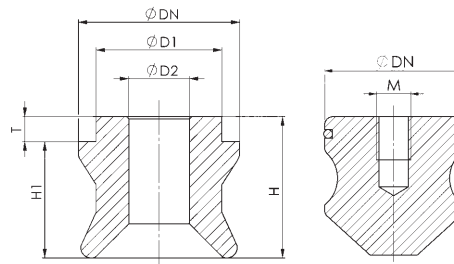

No. 6370ZN-40

K40 pull-stud for M16 engagement screw

Hardened, for clamping modules size K40.



Order no.	Size	dia. DN	dia. D1	dia. D2	H	H1	M	T	Weight [g]
303180	K40	40,0	25	16	34	29	-	5	180
303198	K40	40,0	25	16	34	29	-	5	180
303206	K40	39,8	25	16	34	29	-	5	180
303214	K40	39,8	-	-	-	-	M 8	-	180

Design:

Order no. 303180: zero point pull-stud, order no. 303198: timing pull-stud, order no. 303206: undersize pull-stud, order no. 303214: protection pull-stud

Note:

The timing pull-stud has an additional alignment bore, which can optionally be used for simple installation.

On request:

Protection pull-stud made of plastic.

No. 6370ZN-40

K40 pull-stud for M18 engagement screw

Hardened, for clamping modules size K40.



Order no.	Size	dia. DN	dia. D1	dia. D2	H	H1	M	T	Weight [g]
554942	K40	40,0	30	18	34	29	-	5	170
554943	K40	40,0	30	18	34	29	-	5	170
554944	K40	39,8	30	18	34	29	-	5	170
303214	K40	39,8	-	-	-	-	M 8	-	180

Design:

Order no. 554942: zero point pull-stud, order no. 554943: timing pull-stud, order no. 554944: undersize pull-stud, order no. 303214: protection pull-stud

Note:

The timing pull-stud has an additional alignment bore, which can optionally be used for simple installation.

On request:

Protection pull-stud made of plastic.